Anwendung/Application :

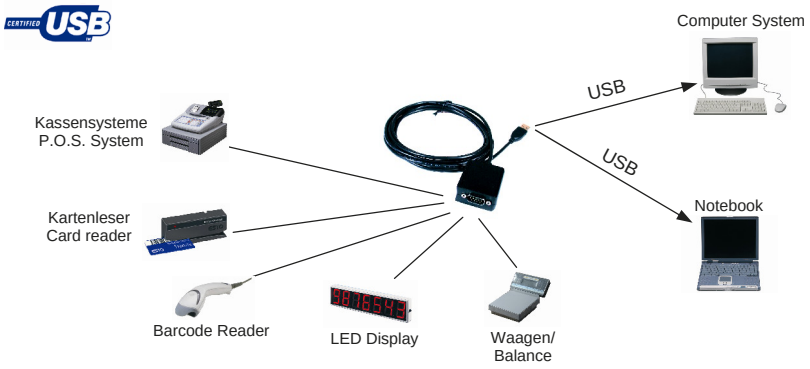

Operating System (OS): | Geprüft/Approved: | Verpackung/Packing:

USB 1.1 zu 1S Seriell RS-232 Port (Prolific Chip-Set)

Beschreibung :	• Das USB 1.1 zu RS-232 Kabel stellt eine Serielle RS-232 High Performance UART 16C550 Ausgang zur Verfügung. Er ist entwickelt worden um einen weiteren Seriellen Ausgang für PC, kleine Workstation oder Server über den USB 1.1 oder 2.0 Bus zu erweitern. Durch die einfache Installation muss der Rechner nicht geöffnet werden und die EX-1302 kann bei laufendem Betrieb installiert werden.
Merkmale :	• Schnittstelle: RS-232 V.24 • FIFO Buffer: 16C550 mit 16Byte • I/O Adressen: wird vom Betriebs System vergeben • Interrupt: wird vom System BIOS vergeben mit Interrupt Sharing • Daten Bits: 5, 6, 7, 8 • Stop Bits: 1, 1.5, 2 • Parity: none, even, odd, space, mark • Signale: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Chip-Set :	• Prolific PL2303HX
Datentransfer-Rate :	• 50 Baud bis 115.2KBaud
Anschlüsse :	• 1 x A-Stecker Upstream • 1 x 9 Pin D-SUB Seriell Stecker
Arbeitstemperatur : Luftfeuchtigkeit :	• 0 bis 55^{0}C • 5 bis 95%
Hardwaresysteme :	• USB 1.1 oder 2.0
Abmessung / Gewicht :	• Kabellänge 1.8 Meter / 150g
Lieferumfang :	• EX-1302, Treiber CD, Handbuch

USB 1.1 to 1S Serial RS-232 Port (Prolific Chip-Set)

Description:	• The USB 1.1 to RS-232 cable provides one high performance 16C550-type UART compatible RS-232 serial port. It is designed for PC, thin client or server to provide instant COM port expansion via the USB 1.1 or 2.0 Bus. With the easy installation you don't need to open the computer system and install the EX-1302 when the system run.
Feature :	• Interface: RS-232 V.24 • FIFO Buffer: 16C550 with 16Byte • I/O addresses: Setting from the operating system • Interrupt: Setting from the System BIOS with Interrupt Sharing • Data Bits: 5, 6, 7, 8 • Stop Bits: 1, 1.5, 2 • Parity: None, even, odd, space, mark • Signal: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Chip-Set :	• Prolific PL2303HX
Data transfer rate :	• 50 Baud up to 115.2KBaud
Connectors :	• 1 x A-male Upstream connector • 1 x 9 pin D-SUB serial male connector
Operating Temperature : Operating Humidity :	• 0 up to 55^{0}C • 5 up to 95%
Hardware system :	• USB 1.1 or 2.0
Size / Weight :	• Cable length 1.8 meter / 150g
Packaging contents :	• EX-1302, Driver CD, Manual